



MULTI SCREEN® MS 1600



3,5 t

ON A GREEN MISSION

soil



construction waste



green waste



wood chips



sand & gravel




recycling



stones



compost





MULTI SCREEN® MS 1600

OPTIONS



Bisection of the inner trommel approx. 75 x 75 mm



Extension for 3rd fraction; punched $\varnothing 40 / \varnothing 50$ mm or not-punched



Outer wire screens optional 2 to 80 mm



Extension for feeder



Inner wire screens optional 40 to 80 mm

MORE OPTIONS



Remote control



Remodeling on skids



Ripped belt for feeder or fine fraction



Remodeling to hook lift



Foldable hopper walls



Additional drawbar eye



Chute for 3rd fraction



Petrol power generator 10,0 kVA



Special lacquering



Diesel power generator 11,0 kVA

The selection of several options can lead to exceeding the permissible total weight of 3.5 t.



MULTI SCREEN® MS 1600

TECHNICAL DESCRIPTION 1

■ Base frame:

longitudinal beam: hollow profile, height 160 mm
 chassis: 2 x 1.8 t air suspension
 product: Knott
 tires: 4 x 185 R 14C
 rim: 4 x 5 ½ J
 brake: drum break, overrunbraked

■ Feeder:

volume: appr. 1.85 m³
 loading height: 2,230 mm
 loading length: 2,450 mm

■ Feeding belt:

belt width: 800 mm
 belt length: 2,600 mm
 speed: adjustable

■ Double trommel:

surface:
 inner: 5.2 m²
 outer: 6.5 m²
 drum diameter: 1,000 mm (inner)
 drum diameter: 1,300 mm (outer)
 drum length: 1,740/ 2,640 mm

Trommel drive: direct over chain and chain wheel

■ Mesh sizes:

inner: 75 x 170 mm (standard)
 outer: optional - exchangeable wire
 screens 2 - 80 mm

Screen change function by means of remote control

■ Cleaning brush:

diameter: 350 mm

■ Conveyor belt fine fraction:

belt width: 1,000 mm
 mechanic foldable
 drop off side: left
 drop off height: 1,740 mm

■ Conveyor belt middle / coarse fraction:

belt width: 600 mm
 mechanic foldable
 drop off side: right
 drop off height: 1,750 mm

■ 2 fractions:

fine fraction: 2 - 80 mm, on demand
 coarse fraction: ex 170 mm (standard)
 3rd fraction: optional by extension

■ Application field:

sand, saw dust, wood chips, compost, construction waste and recycling materials, stones and gravel sand



MULTI SCREEN® MS 1600

TECHNICAL DESCRIPTION 2

Chassis options:



On wheels
(standard max. 3,5 t)
optional 5 t chassis



Track drive
(requires remote
control Maxi)



On skids



Hook lift

Power:

electric drive, 16A
approx. 7.05 kW / 8.8 kVA (standard)
optional petrol-power generator or
diesel-power generator
(not included in the basic price)

Weight:

approx. 3,500 kg
(standard equipped machine)

Hitch:

height adjustable up to 900 mm,
and changeable between trailer hitch ball
Ø 50 mm according
to ISO 24347 and drawbar eye
Ø 40 mm or Ø 50 mm
according to ISO 8755

Dimensions:

Transportation:

length: 6,312 – 6,480 mm
width: 2,192 mm
height: 3,210 mm

Service:

length: 6,312 – 6,480 mm
width: 6,130 mm
height: 2,230 mm

Capacity:

5 - 30 m³/hour
depending on condition of material,
mesh size and feeding




Colour / Coats:

polyurethane one-coat topcoat
silo, engine cover and side covers: RAL 6001 green
chassis, screening drum: RAL 7022 umbra grey
conveyor belt frame: hot galvanized



MULTI SCREEN® MS 1600

DIMENSIONS STANDARD EQUIPPED

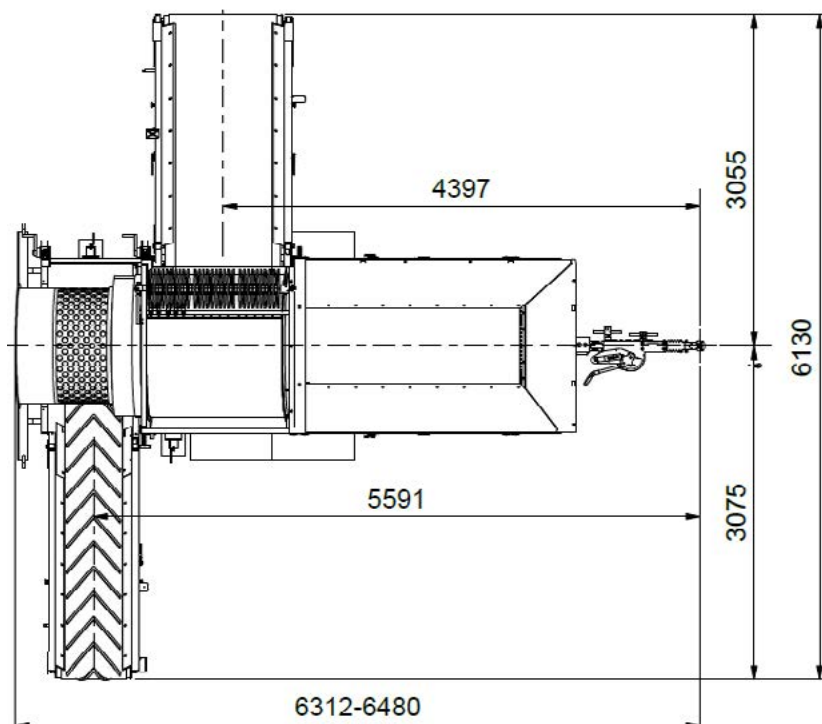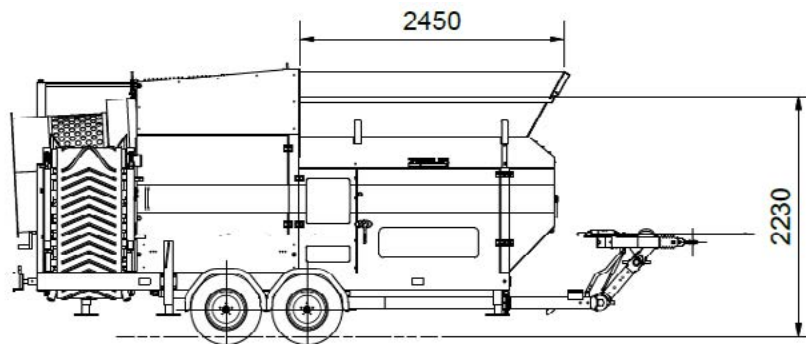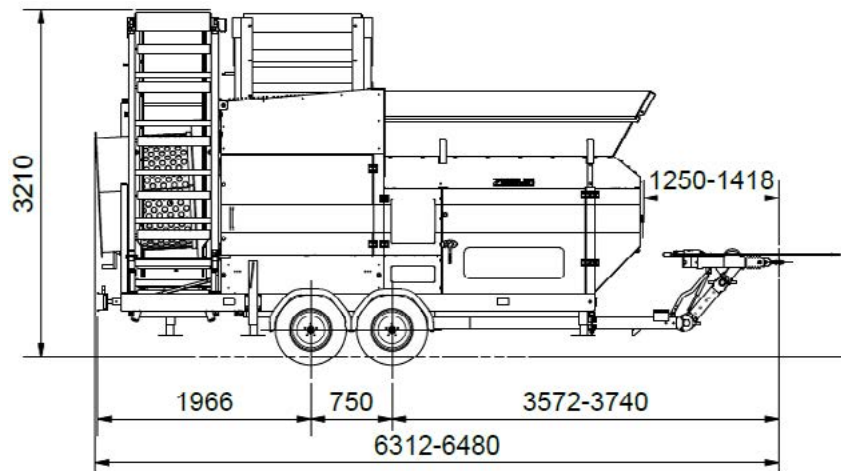



MULTI SCREEN® MS 1600

DIMENSIONS STANDARD EQUIPPED

